


TIRE GEOMETRIES

	Rim Width mm	Overall Diameter mm	Knob Shoulder Width mm	Max Casing Width mm	Radius @ Knob Shoulder Width mm	Radius @ Max Casing Width mm
Endomorph 26x3.7	100.0	736.0	92.0	106.0	340.0	313.0
	82.0	736.0	90.0	99.0	346.0	319.0
	65.0	736.0	88.0	91.0	349.0	325.0
Larry 26x3.8	100.0	741.0	95.0	106.0	346.0	314.0
	82.0	741.0	93.0	98.0	345.0	318.0
	65.0	741.0	91.0	92.0	343.0	323.0
Black Floyd 26x3.8	100.0	738.0	96.0	107.0	342.0	314.0
	82.0	738.0	93.0	101.0	341.0	322.0
	65.0	738.0	89.0	93.0	339.0	327.0
Nate 26x3.8	100.0	749.0	103.0	108.0	345.0	320.0
	82.0	749.0	101.0	103.0	343.0	323.0
	65.0	749.0	99.0	95.0	342.0	323.0
Big Fat Larry 26x4.7	100.0	756.0	109.0	114.0	347.0	320.0
	82.0	756.0	105.0	107.0	346.0	324.0
	65.0	756.0	102.0	101.0	344.0	328.0
Bud 26x4.7	100.0	762.0	118.0	119.0	351.0	330.0
	82.0	762.0	116.0	113.0	351.0	336.0
	65.0	762.0	112.0	105.0	348.0	338.0
Lou 26x4.7	100.0	759.0	119.0	121.0	353.0	325.0
	82.0	759.0	116.0	111.0	350.0	326.0
	65.0	759.0	112.0	104.0	346.0	328.0
Knard 26x3.8	100.0	726.0	99.0	103.0	338.0	315.0
	82.0	726.0	97.0	95.0	337.0	320.0
	65.0	726.0	94.0	91.0	335.0	325.0
Knard 29x3.0	50.0	773.0	77.0	75.0	361.0	343.0
	29.0	772.0	74.0	71.0	357.0	343.0

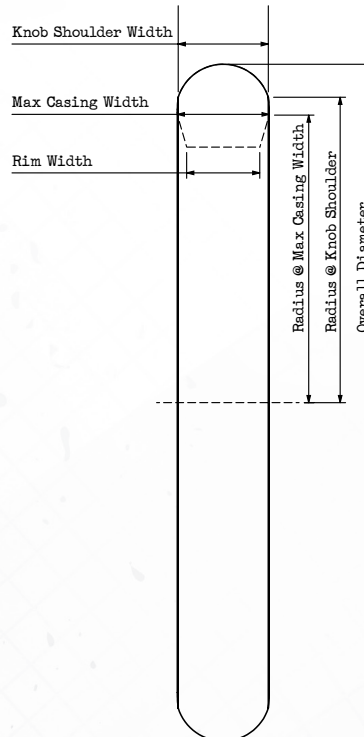

Surly

6400 West 105th Street
Bloomington, MN 55438

The Watts Line: 877.743.3191

The Email: derby@surlybikes.com

The Web Address: www.surlybikes.com